



ENVIRONMENTAL TECHNOLOGY

FDU™

Fluid Distribution Unit



FEATURES

BENEFITS

- | | |
|--|---|
| INDEPENDENT PRESSURIZED FLUID SUPPLY SYSTEM | • REMOVES THE EXPENSE OF PIPING A PRESSURIZED CLEAN WATER / OIL SUPPLY TO A NEW AREA OF THE PLANT |
| CAN FEED A NUMBER OF SEAL SUPPORT SYSTEMS | • REMOVES THE EXPENSE OF PURCHASING ONE SYSTEM PER MECHANICAL SEAL |
| OPTIONAL PRESSURE SWITCH AND ACCUMULATOR | • ENABLES GREATER CONTROL OF WATER / OIL LINE PRESSURE FROM THE FDU |
| REDUCED ENERGY CONSUMPTION | • THE SYSTEM CAN BE OPERATED INTERMITTENTLY TO REDUCE ENERGY COSTS VIA DEAD-ENDED PIPING |







The AESSEAL FDU™ is designed to deliver a reliable and consistent high volume of cooling fluid for mechanical seal and seal support applications. As the FDU™ operates in a closed loop environment with the mechanical seal it provides significant water savings over conventional gland packing or single mechanical seal applications using a Flush or Quench to Drain arrangement. This is especially advantageous when used on large diameter, high shaft speed, double mechanical seal applications as found in the Mining Industry.

The FDU™ system can also be employed to act as a fluid ring main system, providing cool barrier fluid to multiple independent seal support systems. This means that the AESSEAL® water management system principle can be applied without the need for a water ring main. The FDU™ ring main system allows the water management systems to be set at the desired operating parameters for the applications, regardless of differences in equipment operating pressures. The FDU™ is available with a number of modular options to suit a wide range of industrial applications where the quality or availability of a closed loop water / oil supply ring main is in question. This system can also be set up as a dead-ended system and run intermittently to save energy costs.

Specification:

- **Fluid Storage Tank Capacity:** 180 litres (48 US gals), unpressurized
- **Fluid Storage Tank Material:** Stainless Steel
- **Circulation Pump:** Centrifugal Pump, 16 bar (232 psi) rated
- **Barrier Fluid Media:** Water or Oil
- **Optional Extras:** Can be supplied with an accumulator and / or standby circulation pump, depending on the critically of the application.

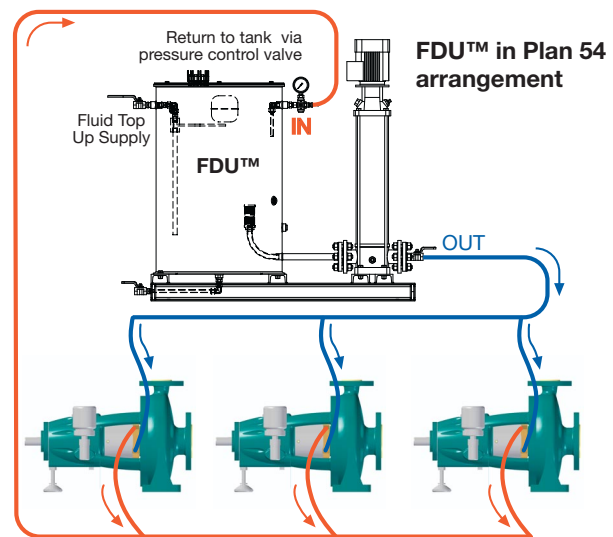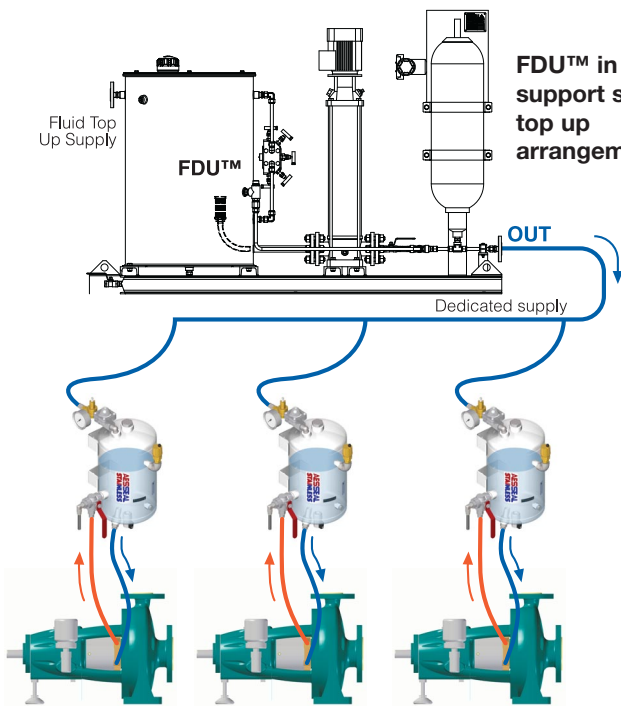

The diagram to the left illustrates how the FDU™ can supply multiple seal support systems. The diagram above illustrates how the FDU™ can supply supply multiple seals in a closed loop operation.

THIS DOCUMENT IS DESIGNED TO PROVIDE DIMENSIONAL INFORMATION AND AN INDICATION OF AVAILABILITY. FOR FURTHER INFORMATION AND SAFE OPERATING LIMITS CONTACT OUR TECHNICAL SPECIALISTS AT THE LOCATIONS BELOW.



USE DOUBLE MECHANICAL SEALS WITH HAZARDOUS PRODUCTS. ALWAYS TAKE SAFETY PRECAUTIONS:

- GUARD YOUR EQUIPMENT
- WEAR PROTECTIVE CLOTHING



UK Sales & Technical advice:
 AESSEAL plc
 Mill Close
 Templeborough
 Rotherham
 S60 1BZ
 United Kingdom **INVESTOR IN PEOPLE**

Telephone: +44 (0) 1709 369966
 Fax: +44 (0) 1709 720788
 E-mail: seals@aesseal.com
 Internet: http://www.aesseal.com

Distributed by:

Our Purpose: *'To give our customers such exceptional service that they need never consider alternative sources of supply.'*

USA Sales & Technical advice:
 AESSEAL Inc.
 355 Dunavant Drive
 Rockford,
 TN, 37853
 USA

Telephone: +1 865 531 0192
 Fax: +1 865 531 0571
 E-mail: usa@aesseal.com

Systems Sales & Technical advice:
 AESSEAL (MCK) Ltd.
 139A Hillsborough Old Road
 Lisburn
 N.Ireland
 BT27 5QE

Telephone: +44 (0) 28 9266 9966
 Fax: +44 (0) 28 9266 9977
 Tel/Fax Hotline: +44 (0) 28 9266 9988
 E-mail: MCK@aesseal.co.uk

ALL SIZES ARE SUBJECT TO MANUFACTURING TOLERANCES. WE RESERVE THE RIGHT TO MODIFY SPECIFICATIONS AT ANY TIME.

AESSEAL plc recognise all trademarks and trademark names as the property of their owners.

FDU™ is a Trademark of AESSEAL plc
 Registered Trademarks: AESSEAL® - AESSEAL plc